


RAY-BAR FIRELITE[®] INSULATED GLASS UNITS: IGU

FOR FIRE RATED IGU APPLICATIONS

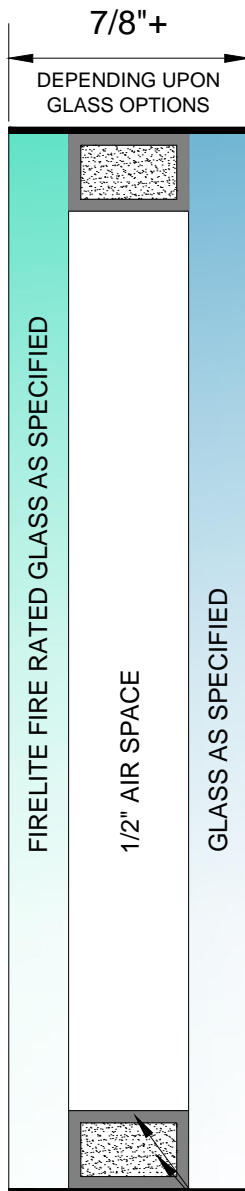

FIRE GLASS OPTIONS

- 3/16" FIRELITE
- 3/16" FIRELITE-NT (SAFETY FILM)
- 5/16" FIRELITE+PLUS (LAMINATED)
- 3/16" FIRELITE OBSCURED
- 3/16" FIRELITE-NT OBSCURED (SAFETY FILM)
- 3/16" FIRELITE FROSTED

AVAILABLE FIRE RATING:

- 20 MINUTE
- 45 MINUTE
- 60 MINUTE
- 90 MINUTE
- 120 MINUTE
- 180 MINUTE
- TEMPERATURE RISE
- HOSESTREAM



*** CHECK APPLICABLE MAXIMUM EXPOSED AREA SIZE LIMITS**

- FIRELITE-NT AND FIRELITE+PLUS MEETS IMPACT RESISTANT TO ANSI Z97.1 AND CPSC 16 CFR 1201

*** IMPACT RESISTANT IS REQUIRED IN DOORS OR IN WALLS WITHIN 24" OF DOOR OPENING**

GLASS OPTIONS

- LOW-E
- SOUND REDUCTION
- INSULATION
- X-RAY RESISTANT
- CLEAR TEMPERED
- BULLET RESISTANT (.44 MAG)
- IMPACT RESISTANT
- MIRRORING
- FROSTED
- OBSCURE



FIRE AND SMOKE PROTECTIVE

- UL 9
- UL10
- NFPA 80
- NFPA 252
- NFPA 257

**FIRELITE[®]
FIRELITE-NT
FIRELITE+PLUS**

*** ALSO AVAILABLE FOR**

FIRE RESISTIVE HEAT BARRIER

RADIANT HEAT AND CONDUCTIVE HEAT

- ASTM E-119
- UL 263
- NFPA 251 / 252

PYROSTOP[®]

STAINLESS STEEL SPACER WITH DESICCANT FILLER

SILICONE PERIMETER SEALED

U.L. FILE 38927

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

© 2019 Ray-Bar Engineering Corporation. * Ray-Bar is a registered trademark of Ray-Bar Engineering Corp. * FireLite and FireLite Plus are registered trademarks of NEG Co, Ltd. * Pilkington Pyrostop is a registered trademark of Pilkington plc. * WireLite and Fireglass are registered trademarks of TGP. * For additional information and details please contact Ray-Bar

	JOB NAME:
	LOCATION:
	ROOM NUMBER:
	SHEET ____ OF ____:
RAY-BAR FIRELITE INSULATED GLASS UNITS	

RAY-BAR ENGINEERING CORP.		SCALE NTS FIRELITE RB-IGU
Toll Free: 1(800) 444-XRAY / 1(800) 444-9729 Telephone: (626) 969-1818 24 Hour Fax: 1(800) 333-XRAY / 1(800) 333-9729 website: www.raybar.com		
(Empty space for notes or additional contact info)		
(Empty space for notes or additional contact info)		