


RAY-BAR FIRE RATED WINDOW FRAMES TECHNICAL DATA

IT IS RESPONSIBILITY OF THE CUSTOMER TO VERIFY AND CONFIRM FIRE RATING REQUIREMENTS PRIOR TO ORDERING

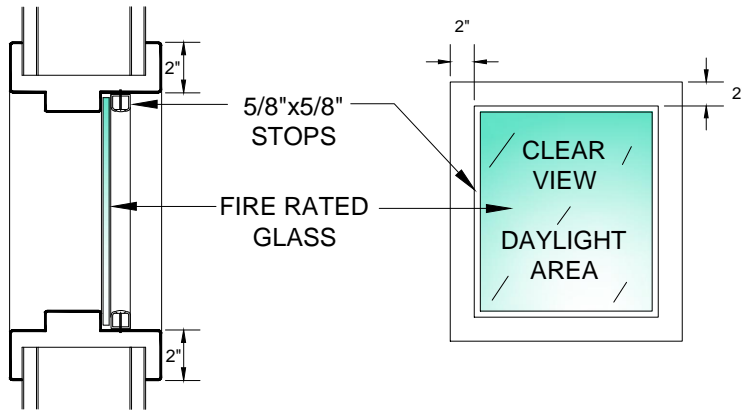

(WALLS: 4 3/4" TO 14 1/2" MAX.)


AVAILABLE FIRE RATINGS: 20 • 45 • 60 AND 90 MINUTES

FRAME PROFILES

ANCHORS



EQUAL RABBET




SINGLE RABBET

- FLUSH Z FOR STEEL STUDS
- STRAP FOR WOOD STUDS
- T-STRAP FOR CAST CONCRETE
- PUNCH / DIMPLE TUBE FOR MASONRY


FIRE RATED GLASS OPTIONS : SIZE LIMITS IN MAXIMUM VISIBLE EXPOSED AREA DAYLIGHT CLEAR VIEW

1/4 WIRELITE - NT 20 /45 MINUTES




- IMPACT RESISTANT MEETING ANSI Z.97.1 AND CPSC 16 CFR 1201 CAT 2
- DIAMOND PATTERN WIRE
- INSULATED GLASS UNITS AVAILABLE

1/4 WIRELITE - NT WITH PEMKO FG3000 FIRE TAPE 45 MINUTES




• EXPOSED CLEAR VIEW DAYLIGHT LIMITS •

3/16\"/>



- FOR IMPACT RESISTANCE MEETING ANSI Z.97.1 AND CPSC 16 CFR 1201 CAT 2
- 3/16\"/>
- INSULATED GLASS UNITS AVAILABLE

3/16\"/>



- IGU'S ALSO AVAILABLE: FROSTED, MIRRORED, LOW-E, TINTED, INSULATED AND X-RAY PROTECTIVE.

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

© 2019 Ray-Bar Engineering Corporation. * Ray-Bar is a registered trademark of Ray-Bar Engineering Corp. * FireLite and FireLite Plus are registered trademarks of NEG Co, Ltd. * Pilkington Pyrostop is a registered trademark of Pilkington plc. * WireLite and Fireglass are registered trademarks of TGP. * For additional information and details please contact Ray-Bar



| | |
|---------------------|--|
| JOB NAME: | |
| LOCATION: | |
| ROOM NUMBER: | |
| SHEET ____ OF ____: | |

RAY-BAR FIRE RATED WINDOW FRAMES TECH DATA

RAY-BAR ENGINEERING CORP.

Toll Free: 1(800) 444-XRAY / 1(800) 444-9729
 Telephone: (626) 969-1818
 24 Hour Fax: 1(800) 333-XRAY / 1(800) 333-9729
 website: www.raybar.com

WWW.RAYBAR.COM

RAY-BAR
 FIRE RATED
 HOLLOW
 METAL
 WINDOW
 TECHNICAL
 DATA