


RAY-BAR FIRE RATED GLASS

HAZARDOUS GLAZING LOCATIONS REQUIRING IMPACT RESISTANT SAFETY GLASS PER IBC 2406

RAY-BAR IMPACT RESISTANT FIRE RATED SAFETY GLASS OR INSULATED GLASS UNITS

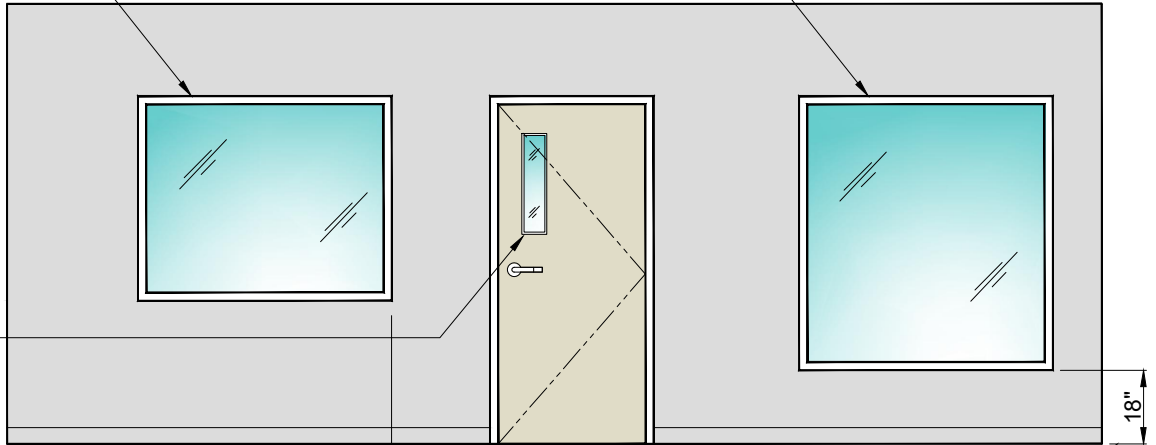

ALL FIRE RATED GLAZING OCCURRING IN DOOR VISION FRAMES MUST BE IMPACT RESISTANT SAFETY GLAZING.

ANY WINDOW THAT OCCURS WITHIN 24" OF A DOOR OPENING MUST BE IMPACT RESISTANT SAFETY GLAZING AND PROPERLY LABELED.

ANY WINDOW THAT OCCURS WITHIN 18" OF FLOOR MUST BE IMPACT RESISTANT SAFETY GLAZING AND PROPERLY LABELED.

RAY-BAR FIRE RATED SAFETY GLASS OR IGU'S ARE PERMANENTLY LABELED AS MEETING ANSI Z97.1 AND CPSC 16 CFR PART 1201 CAT II AS REQUIRED BY IBC 2406 FOR IMPACT RESISTANCE "SAFETY GLAZING".

THIS IS NOT REQUIRED TO BE A "TEMPERED" PRODUCT. (WITH THE EXCEPTION OF FIREGLASS 20 FOR DOORS) THIS PRODUCT IS TO BE UTILIZED BY CUSTOMER IN RISK AREAS AND LOCATIONS TO "REDUCE OR MINIMIZE THE LIKELIHOOD OF CUTTING AND PIERCING INJURIES WHEN SAID GLAZING MATERIAL IS BROKEN BY HUMAN CONTACT".

• CONTACT RAY-BAR ENGINEERING CORP. AT (800) 444-9729 OR SALES@RAYBAR.COM FOR THE FOLLOWING SAFETY GLASS PRODUCTS:

- X-RAY SAFETY GLASS • FIRE RATED GLASS • BULLET RESISTANT GLASS •
- FIRELITE-NT • FIRELITE+PLUS • WIRELITE-NT • FIREGLASS 20 • PYROSTOP •
- INSULATED GLASS UNITS • INTEGRAL MINI BLINDS • SWITCHABLE PRIVACY GLASS • LOW-E •

The following Ray-Bar Fire Glass products meet the Impact Resistant Safety requirements for these Hazardous Locations: 3/16" FireLite-NT (Safety Filmed), 5/16" FireLite+Plus (Laminated), 1/4" WireLite-NT (Safety Filmed), 1/4" FireGlass 20 (Tempered) and all Pilkington Pyrostop glass (Multi-Laminated) will meet International Building Code: IBC 2406 Safety Glazing requirements.

PHONE: (800) 444-9729 • E-MAIL: SALES@RAYBAR.COM

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

© 2019 Ray-Bar Engineering Corporation. * Ray-Bar is a registered trademark of Ray-Bar Engineering Corp. * FireLite and FireLite Plus are registered trademarks of NEG Co, Ltd. * Pilkington Pyrostop is a registered trademark of Pilkington plc. * WireLite and Fireglass are registered trademarks of TGP. * For additional information and details please contact Ray-Bar



JOB NAME:
LOCATION:
ROOM NUMBER:
SHEET ____ OF ____:

RAY-BAR SAFETY GLASS CODE LOCATION REQUIREMENTS

RAY-BAR ENGINEERING CORP.

Toll Free: 1(800) 444-XRAY / 1(800) 444-9729
Telephone: (626) 969-1818
24 Hour Fax: 1(800) 333-XRAY / 1(800) 333-9729
website: www.raybar.com

SCALE
N.T.S.

RAY-BAR
FIRE RATED
SAFETY GLASS