


# RAY-BAR FIRE RATED VISION FRAME WITH WIRELITE®-NT



## TECHNICAL DATA

- \* 20,45, AND 60 MINUTES FIRE RATING.
- \* MEETS HOSE STREAM TEST
- \* IMPACT RESISTANT MEETING ANSI Z97.1 AND CPSC 16 CFR 1201 CAT II
- \* POSITIVE PRESSURE TEST UL 10C
- \* FILMED TO MEET IMPACT RESISTANT SAFETY CODES
- \* WIRELITE-NT SIZES UP TO 34 3/4" X 92" (3289 SQ.IN. MAX. VISIBLE CLEAR VIEW)
- \* SEE FIRE RATING SIZE CHART FOR MORE INFORMATION.
- \* HIGHER FIRE RATINGS UP TO 90 MINUTE AND LARGER SIZES WHEN GLAZED WITH PEMKO FG3000 FIRE TAPE.

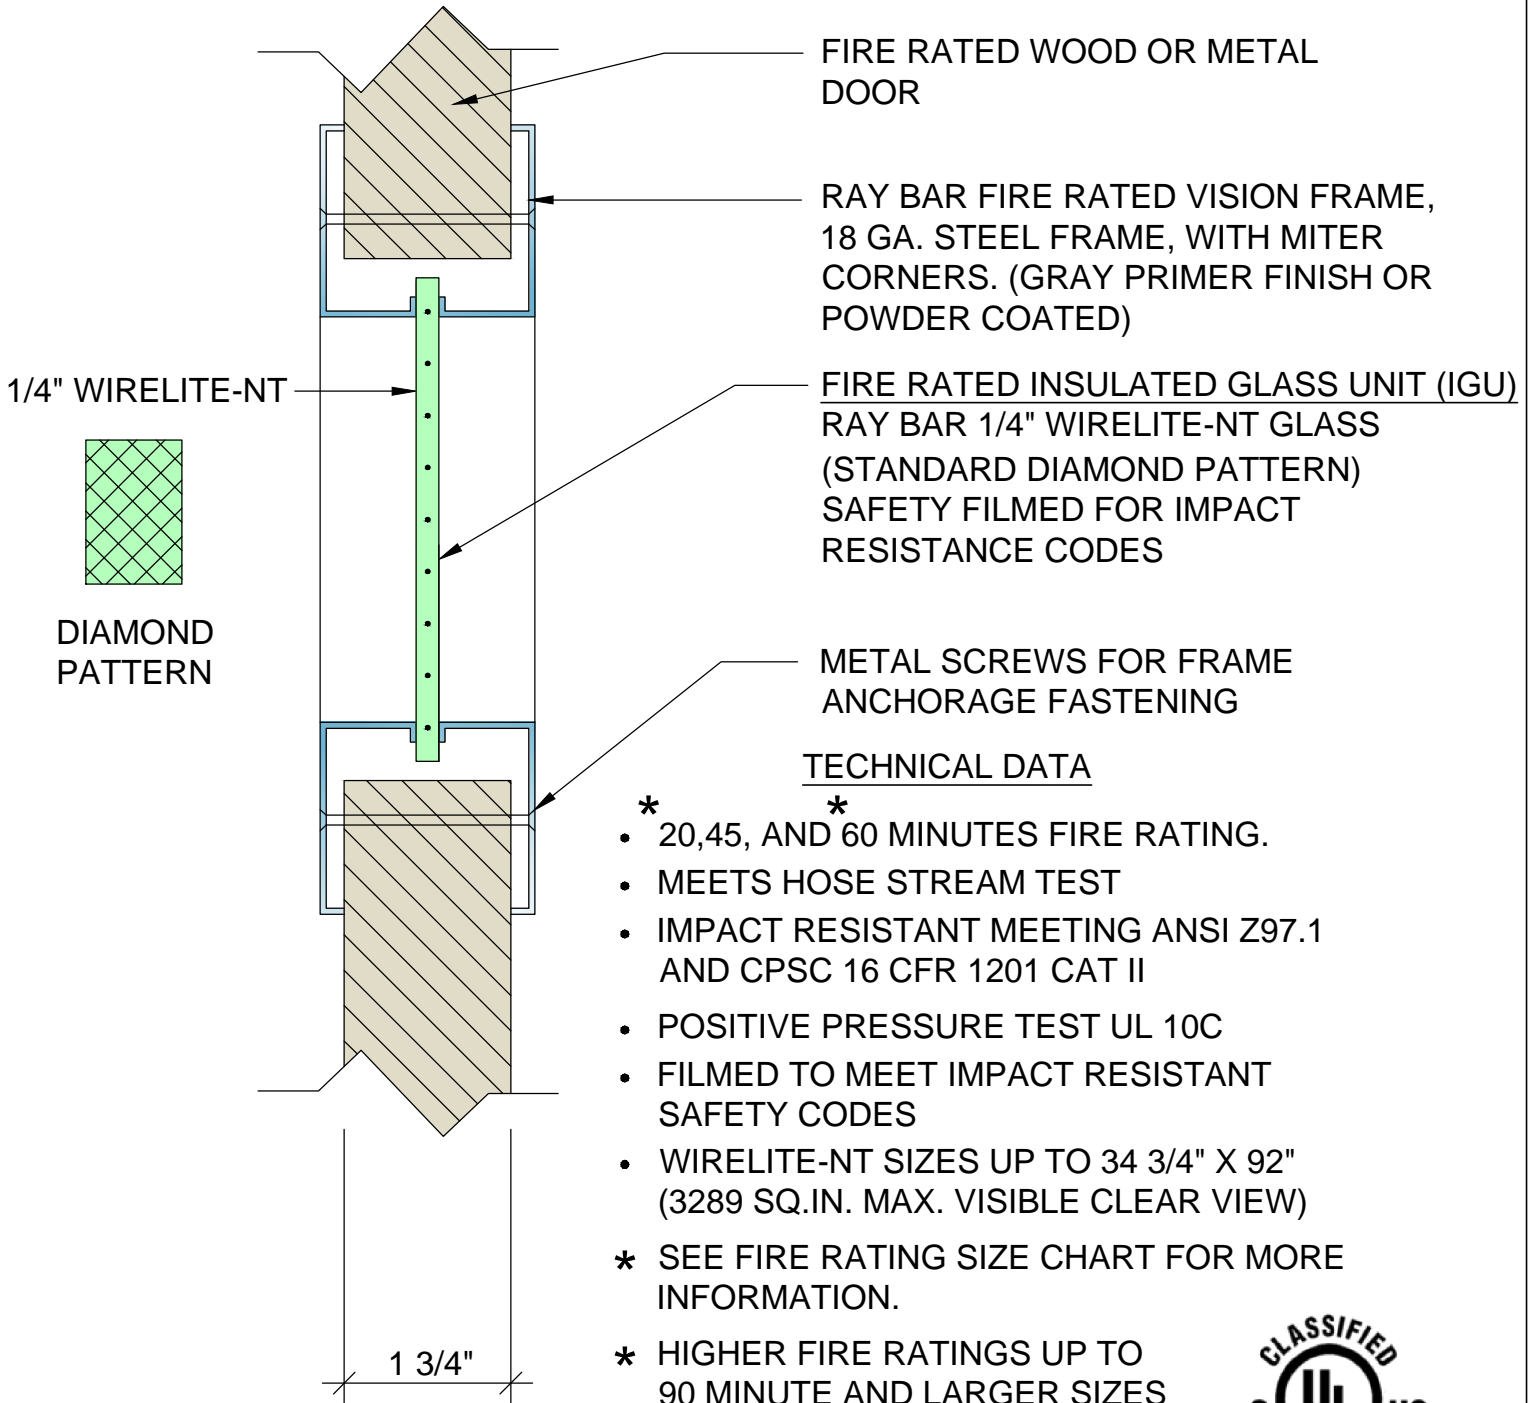

UL FILE #R38927

NTS

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

© 2019 Ray-Bar Engineering Corporation. \* Ray-Bar is a registered trademark of Ray-Bar Engineering Corp. \* FireLite and FireLite Plus are registered trademarks of NEG Co, Ltd. \* Pilkington Pyrostop is a registered trademark of Pilkington plc. \* WireLite and Fireglass are registered trademarks of TGP. \* For additional information and details please contact Ray-Bar



JOB NAME:	
LOCATION:	
ROOM NUMBER:	
SHEET ____ OF ____:	

RAY-BAR FIRE RATED VISION FRAME WIRELITE-NT

### RAY-BAR ENGINEERING CORP.

Toll Free: 1(800) 444-XRAY / 1(800) 444-9729  
 Telephone: (626) 969-1818  
 24 Hour Fax: 1(800) 333-XRAY /  
 1(800) 333-9729

[www.raybar.com](http://www.raybar.com)

SCALE  
NTS

**RAY-BAR**  
**FR-VF**  
WIRELITE-NT