

RAY-BAR FIRELITE-NT INSULATED GLASS UNIT


FIRE RATED 20 • 45 • 60 • 90 • 180 MINUTES FOR DOOR VISION WINDOWS

GLASS COMPONENTS

- 3/16" FIRELITE-NT
- 3/16" CLEAR TEMPERED

EXPOSED CLEAR VIEW DAYLIGHT LIMITS FIRE RATED IGU IN DOORS


3/16" FIRELITE-NT • 5/16" FIRELITE + PLUS
(FILMED) (LAMINATED)

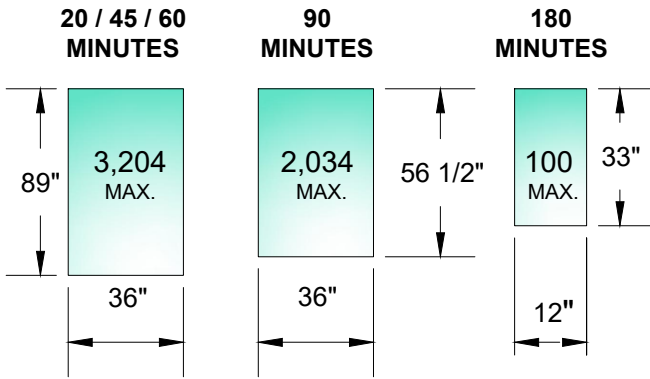

SIZE LIMITS IN MAXIMUM VISIBLE EXPOSED CLEAR VIEW

OTHER OPTIONS

- 5/16" FIRELITE+ PLUS (LAMINATED)
- X-RAY PROTECTION
- FROSTED
- MIRROR / REFLECTIVE
- 1/4" WIRELITE-NT (DIAMOND PATTERN)

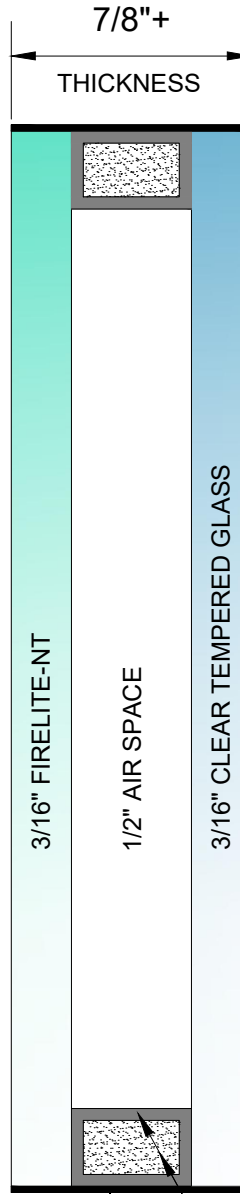

PERFORMANCE

- 45/60/90/180 MINUTES RATED
- IMPACT RESISTANT
- MEETS ANSI Z.971 AND CPSC 16 CFR 1201 CAT 2

SAFETY STANDARDS

- ANSI Z97.1
- CPSC 16 CFR 1201
- UL9
- UL10C
- NFPA 80
- NFPA 252
- NFPA 257



FILE R38927

STAINLESS STEEL
SPACER WITH DESICCANT FILLER

SILICONE
PERIMETER SEALED

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

	JOB NAME:
	LOCATION:
	ROOM NUMBER:
	SHEET ____ OF ____:
	RAY-BAR FIRELITE-NT INSULATED GLASS UNIT

RAY-BAR ENGINEERING CORP. Toll Free: 1(800) 444-XRAY / 1(800) 444-9729 Telephone: (626) 969-1818 24 Hour Fax: 1(800) 333-XRAY / 1(800) 333-9729 website: www.raybar.com	FIRE RATED IGU FOR DOORS FIRELITE-NT RB-IGU
--	---